



SNATCH BLOCKS

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.
Read important warnings and information in T.O.C. > GENERAL WARNINGS and BLOCKS ⚠️



K4180- WITH HOOK

Bronze bushed, painted blue.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 3" | 2 | 3/8" | 5 |
| 4.1/2" | 4 | 1/2" | 14 |
| 6" | 8 | 3/4" | 28 |
| 8" | 8 | 3/4" | 34 |
| 10" | 8 | 3/4" | 53 |

STAINLESS LATCH KITS

Heavy duty construction; designed for our snatch block hooks.



| Block Size | Approx. Weight each in Pounds |
|------------|-------------------------------|
| 3" | .04 |
| 4.1/2" | .08 |
| 6" | .11 |
| 8" | .11 |



K4190- WITH SHACKLE

Bronze bushed, painted blue.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 3" * | 2 | 3/8" | 5 |
| 4.1/2" | 4 | 1/2" | 13 |
| 6" | 8 | 3/4" | 29 |
| 8" | 8 | 3/4" | 36 |
| 10" | 8 | 3/4" | 44 |

* Fitted with swivel eye.



K4040-TAIL BOARD

Bronze bushed, painted blue.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 3" * | 2 | 3/8" | 3.5 |
| 4.1/2" | 4 | 1/2" | 7.5 |
| 6" | 8 | 3/4" | 16 |
| 8" | 8 | 3/4" | 23 |

* Also available Hot Galvanized.



SNATCH BLOCKS

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Read important warnings and information in T.O.C. > GENERAL WARNINGS and BLOCKS .

K4182—WITH HOOK

Bronze bushed, painted yellow.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 6" | 10 | 3/4" ~ 7/8" | 26 |
| 8" | 10 | 3/4" ~ 7/8" | 35 |



K4192—WITH SHACKLE

Bronze bushed, painted yellow.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 6" | 10 | 3/4" ~ 7/8" | 28 |
| 8" | 10 | 3/4" ~ 7/8" | 37 |
| 10" | 10 | 1" | 42 |



K4185—WITH HOOK

Bronze bushed, painted red.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 6" | 12 | 3/4" ~ 7/8" | 27 |
| 8" | 12 | 3/4" ~ 7/8" | 36 |



K4195—WITH SHACKLE

Bronze bushed, painted red.

| Sheave Size | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|----------------------------|----------------|-------------------------------|
| 6" | 12 | 3/4" ~ 7/8" | 28 |
| 8" | 12 | 3/4" ~ 7/8" | 38 |
| 10" | 12 | 1" | 44 |





BLOCKS AND PULLEYS

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Read important warnings and information in T.O.C. > GENERAL WARNINGS and BLOCKS ⚠️

TONG LINE BLOCK, SWIVEL EYE

Roller bearing with pressure grease lubrication. Forged swivel eye top fitting.

| Sheave Size | Model Number | Working Load Limit in Pounds | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|--------------|------------------------------|----------------|-------------------------------|
| 8" | K1710 | 6,000 | 5/8" | 23 |




LIGHT DUTY SNATCH BLOCKS

| Sheave Size | Model Number | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|--------------|----------------------------|----------------|-------------------------------|
| 3" | KC 3* | 1 | 3/8" | 3 |
| 4" | KC 4** | 2 | 3/8" | 4 |

* Plated; without grease nipple; with screw pin chain shackle.

** Hot galvanized; with grease nipple.

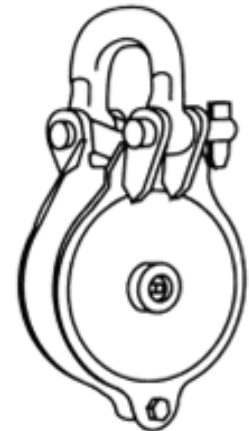

HAY FORK PULLEYS - WITH SWIVEL EYE

Galvanized, bronze bushed, with grease nipple.

| Sheave Size | Model Number | Working Load Limit in Tons | Wire Rope Size | Approx. Weight each in Pounds |
|-------------|--------------|----------------------------|----------------|-------------------------------|
| 4" | KW 4 | 1 | 1/2" Wire | 6 |
| 4" | SM 2 | 1 | 1.1/8" Manila | 6 |
| 6" | KM 12 | 2 | 1.1/4" Manila | 11 |

