




KULKONI / CM MIDLAND DOMESTIC FITTINGS

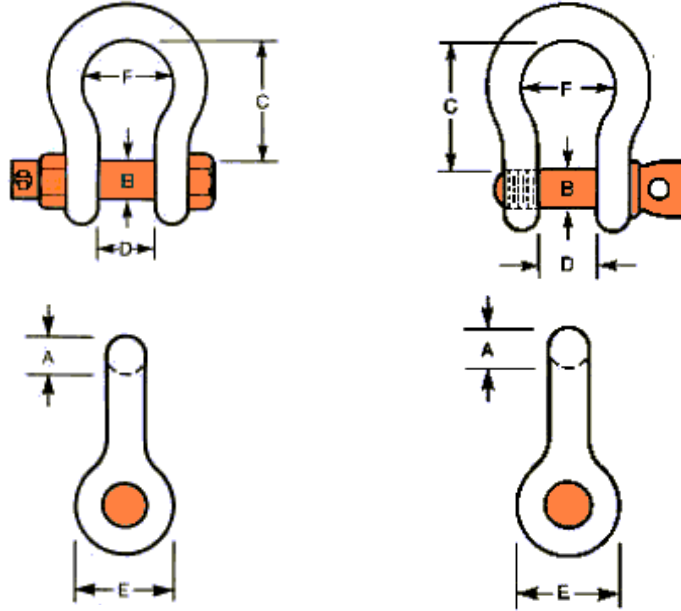

GALVANIZED SCREW PIN ANCHOR SHACKLES GALVANIZED BOLT TYPE ANCHOR SHACKLES

Size (A)	Working Load Limit in Tons	Pin Diam. In Inches (B)	Approx. Weight Each in Pounds	Dimensions in Inches			
				C	D	E	F
3/16"	1/3	1/4	.05	.88	.38	.56	.63
1/4"	1/2	5/16	.13	1.06	.47	.66	.75
5/16"	3/4	3/8	.21	1.25	.53	.81	.84
3/8"	1	7/16	.33	1.44	.63	.97	1.00
7/16"	1.1/2	1/2	.47	1.69	.75	1.06	1.13
1/2"	2	5/8	.76	1.88	.81	1.31	1.25
5/8"	3.1/4	3/4	1.44	2.44	1.06	1.56	1.69
3/4"	4.3/4	7/8	2.3	2.88	1.19	1.88	1.94
7/8"	6.1/2	1	3.5	3.38	1.44	2.13	2.19
1"	8.1/2	1.1/8	5.0	3.81	1.69	2.38	2.63
1.1/8"	9.1/2	1.1/4	7.0	4.25	1.75	2.63	2.88
1.1/4"	12	1.3/8	9.5	3.97	2.00	2.91	3.13
1.3/8"	13.1/2	1.1/2	13.0	5.31	2.13	3.25	3.50
1.1/2"	17	1.5/8	16.5	5.69	2.31	3.50	3.75
1.3/4"	25	2	29.0	7.06	2.88	4.25	4.88
2"	35	2.1/4	43.0	7.75	3.31	4.88	5.44

**NOTE: Working Load limits equal to industry standard not to CM higher ratings.
Never Exceed working load limits.**