




KULKONI / *CM MIDLAND* DOMESTIC FITTINGS

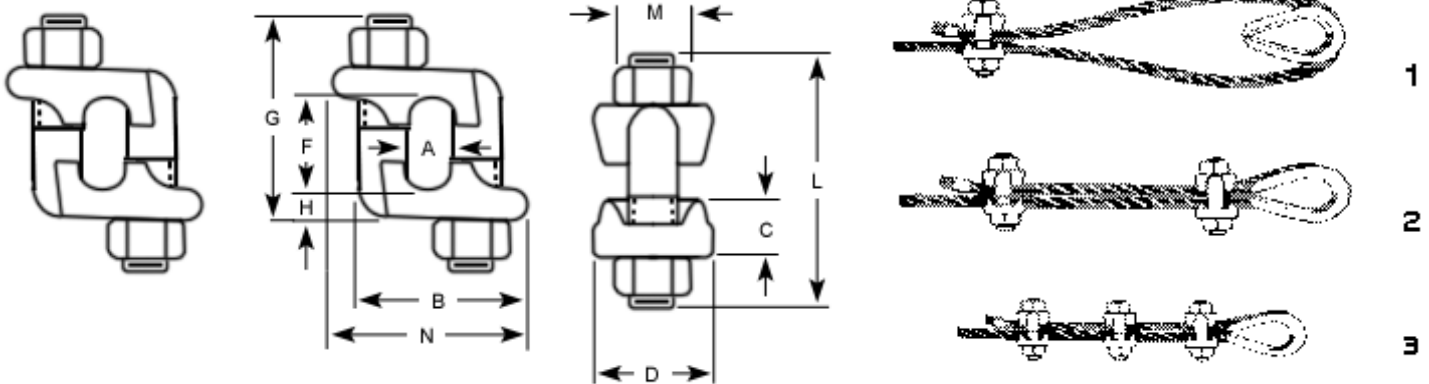

MID-GRIP™ (DOUBLE SADDLE)

Dimensions (inches)												Min. no. clips	Rope turn-back (in.)	Torque* (ft.lbs.)	Weight per 100 (lbs.)
Size	A	B	C	D	Thd.	F	G	H	L	M	N				
3/16 & 1/4	.28	1.25	.34	.94	3/8-16	.50	1.28	.22	1.56	.69	1.28	2	4	30	21
5/16	.34	1.38	.44	1.06	3/8-16	.63	1.47	.18	1.81	.69	1.41	2	5	30	27
3/8	.41	1.56	.50	1.06	7/16-14	.75	1.81	.25	2.31	.75	1.85	2	5.1/4	45	45
7/16 & 1/2	.50	1.78	.56	1.25	1/2-13	1.00	2.19	.28	2.75	.88	2.06	2	6.1/2	65	65
9/16 & 5/8	.66	2.25	.69	1.50	5/8-11	1.25	2.69	.28	3.31	1.06	2.59	3	12.3/4	130	113

* Based on clean, unlubricated threads.

Table above shows minimum torque required to reach maximum holding power of wire rope clip.