



D-RINGS

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Read important warnings and information in T.O.C. > GENERAL WARNINGS .




DO NOT USE FOR OVERHEAD LIFTING

FORGED CARBON STEEL, QUENCHED & TEMPERED

D-Rings zinc plated, Straps self-colored

Size	Dimensions in Inches				Breaking Strength in Tons *	Approx. Weight Each in Pounds
	A	B	C	D		
F187	0.50	2.63	2.00	1.97	7	1.19
F653	0.87	4.72	3.15	3.94	36	6.61
F654	1.00	5.00	3.66	1.61	41	7.72
F655	1.00	5.00	4.02	1.97	50	9.92

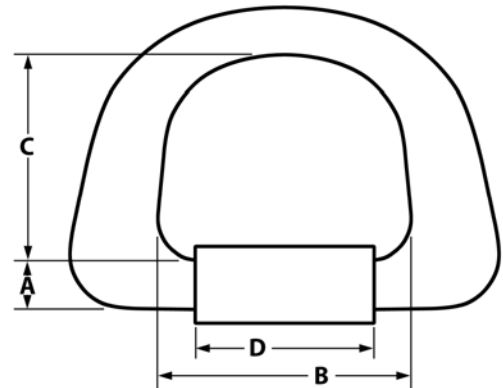

D-Rings are designed for tie-down purposes only and are not intended for lifting.

* Please note that the loads shown are “ultimate breaking strength” loads and not “working load limits” and are based on a single straight line pull. Working load limits are to be determined by the user and should be based on the particular application, angle of pull (which will reduce breaking strength), and any other applicable standards or specifications. Always apply an appropriate safety factor.

D-Rings and Straps should not be used at temperatures exceeding 500 degrees Fahrenheit as this will permanently alter the properties of the steel and thus reduce the strength of the D-Ring. Care should be taken when welding the strap so as not to allow the D-Ring to be heated above 500 degrees.

D-Rings and Straps are only sold together as a set and are not available individually.