




REGULAR PATTERN EYE BOLT WITH HEAVY HEX NUT

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Never insert the point of a hook in an eyebolt. Always use a shackle.
Read important warnings in T.O.C. > EYE BOLTS ⚠
and GENERAL WARNINGS.

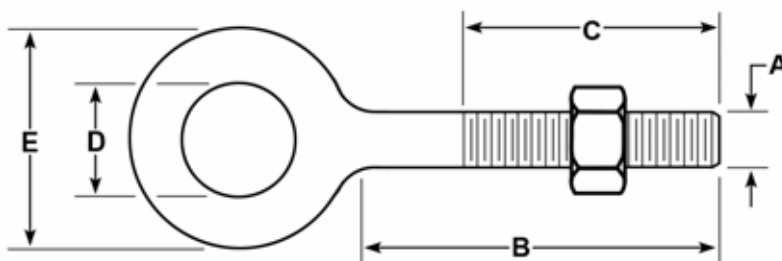

Straight shank, forged carbon steel, heat treated, hot galvanized. Heavy hex nut according to ASME/ANSI B18.2.2.

Size Diameter x Shank A B	Working Load Limit in Pounds*	Approx. Weight each in Pounds	Dimensions in Inches		
			C	D	E
1/4" x 2"	650	.06	1.50	.50	1.00
1/4" x 4"	650	.10	2.50	.50	1.00
5/16" x 2.1/4"	1,200	.13	1.50	.63	1.25
5/16" x 4.1/4"	1,200	.17	2.50	.63	1.25
3/8" x 2.1/2"	1,500	.22	1.50	.75	1.50
3/8" x 4.1/2"	1,500	.28	2.50	.75	1.50
3/8" x 6"	1,500	.33	2.50	.75	1.50
1/2" x 2"	2,600	.46	1.50	1.00	2.00
1/2" x 3.1/4"	2,600	.54	1.50	1.00	2.00
1/2" x 6"	2,600	.68	3.00	1.00	2.00
1/2" x 8"	2,600	.80	3.00	1.00	2.00
1/2" x 10"	2,600	.93	3.00	1.00	2.00
1/2" x 15"	2,600	1.23	5.00	1.00	2.00
5/8" x 4"	5,200	1.00	2.00	1.25	2.50
5/8" x 6"	5,200	1.14	3.00	1.25	2.50
5/8" x 8"	5,200	1.38	3.00	1.25	2.50
5/8" x 10"	5,200	1.55	3.00	1.25	2.50
5/8" x 12"	5,200	1.69	4.00	1.25	2.50
3/4" x 4.1/2"	7,200	1.64	2.00	1.50	3.00
3/4" x 6"	7,200	1.81	3.00	1.50	3.00
3/4" x 8"	7,200	2.00	3.00	1.50	3.00
3/4" x 10"	7,200	2.30	3.00	1.50	3.00
3/4" x 12"	7,200	2.50	4.00	1.50	3.00
3/4" x 15"	7,200	2.90	5.00	1.50	3.00
1" x 6"	10,000	3.60	3.00	2.00	4.00
1" x 9"	10,000	4.30	4.00	2.00	4.00
1" x 12"	10,000	5.00	4.00	2.00	4.00

*Regular nut eye bolts are designed for straight line pull applications only.

Never apply load at an angle.