




MALLEABLE WIRE ROPE CLIPS

! WARNING

Improper use and installation of cast malleable wire rope clips can result in serious injury or death.

- NEVER use cast malleable wire rope clips for lifting or suspending ANY load.
- Cast malleable wire rope clips are to be used only for non-critical, light duty applications with small applied loads.

For complete installation instructions refer to T.O.C. > CLIPS ⚠.

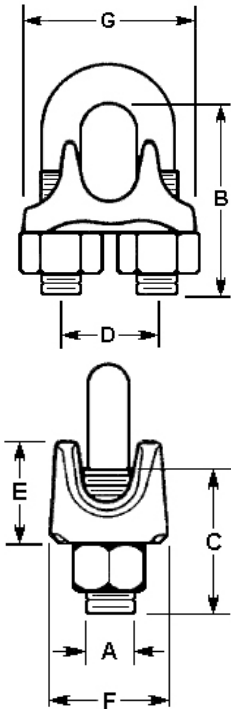

ZINC PLATED, MALLEABLE, Meets the performance requirements of Federal Specification FF-C-450D, Type 1, Class 2.**

Size	Min. Clips Req'd	Amt. Wire Rope to turn back	Torque in ft. lbs.*	Approx. Wt. in Pounds	Dimensions in inches						
					A	B	C	D	E	F	G
1/16" **	3	4"	2	.03	.15	.65	.45	.38	.38	.45	.69
1/8" **	3	4.3/4"	3	.04	.18	.81	.50	.50	.50	.56	.94
3/16"	3	5.1/2"	4.5	.063	.25	.94	.56	.56	.56	.63	1.06
1/4"	3	7"	15	.13	.31	1.19	.75	.75	.69	.75	1.31
5/16"	3	7.3/4"	15	.15	.31	1.31	.84	.75	.75	.75	1.44
3/8"	3	9.1/2"	30	.21	.38	1.63	1.00	.88	.84	.88	1.63
7/16"	4	10.1/4"	40	.37	.44	2.00	1.19	1.06	1.00	1.06	1.88
1/2"	4	15.1/4"	45	.37	.44	2.00	1.19	1.06	1.00	1.06	1.88
9/16"	4	16"	50	.59	.50	2.31	1.38	1.25	1.25	1.28	2.09
5/8"	4	16"	75	.59	.50	2.31	1.38	1.25	1.25	1.28	2.09
3/4"	5	22.1/4"	75	.84	.56	2.56	1.56	1.31	1.44	1.56	2.38
7/8"	5	23.1/2"	130	1.25	.63	3.06	1.81	1.63	1.75	1.81	2.88
1"	6	31"	130	1.66	.63	3.44	2.00	1.88	2.06	2.00	3.00
1.1/8"	7	39"	200	2.43	.75	4.00	2.75	2.00	2.19	2.06	3.38

* Based on clean, unlubricated threads. The table above shows the minimum torque required to reach maximum holding power of wire rope clips.

** NOTE: 1/16" and 1/8" are not covered by Federal Specification FF-C-450D.

STAINLESS STEEL, CAST, MALLEABLE STYLE

Fits	Min. Clips Req'd.	Torque in ft. lbs. *	Approx. Wt. in Pounds	Dimensions in Inches	
				A	B
1/8"	3	3	.05		
5/32"	3	4	.06	.15	.79
3/16"	3	4.5	.19	.19	.97
1/4"	3	15	.19	.22	1.08
5/16"	3	15	.30	.30	1.34
3/8"	3	30	.46	.38	1.78
1/2"	4	45	.65	.45	2.07
5/8"	4	75	.78		
3/4"	5	75	1.09	.55	2.88
7/8"	5	130	1.63	.61	3.15
1"	6	130	2.15	.62	3.53

* Based on clean, unlubricated threads. The table above shows the minimum torque required to reach maximum holding power of wire rope clips.