




ALLOY STEEL BOLT TYPE ANCHOR SHACKLES

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Read important warnings and information in T.O.C. > **GENERAL WARNINGS** and **SHACKLES** ⚠️.

Meets the performance requirements of Federal Specification RR-C-271D, Type IV A, Class 3, Grade B, Amendment 1 - for sizes 1.1/2" through 3". All sizes forged all-alloy steel, heat treated, permanently marked with size and Working Load Limit.

Size (A)	Working Load Limit (WLL) in tons	Bolt Ø (B)	Length inside (C)	Width between eyes (D)		(E)	(F)	Appx. Weight each in pounds
				Nominal	Tolerance			
1.1/2	30	1.5/8	5.3/4	2.3/8	± 1/8	3.3/4	3.3/8	19.7
1.3/4	40	2	7	2.7/8	± 3/16	4.1/2	4.1/2	32.6
2	55	2.1/4	7.3/4	3.1/4	± 3/16	5.1/4	5.1/4	48.3
2.1/2	85	2.3/4	10.1/2	4.1/8	± 1/4	6.1/4	6.3/4	94.0
3	120	3.1/4	13	5	± 1/4	6.3/4	7.3/8	145.0
3.1/2	150	3.3/4	15	5.1/2	± 1/4	8.1/2	9	250.0
4	175	4.1/4	15	5.1/2	± 1/4	9.1/2	10.1/2	358.0
4.1/4	200	4.3/4	21.1/4	7	± 1/4	10	12.3/4	460.0
4.3/4	250	5.1/8	22.1/2	8.1/4	± 1/4	11	15.3/4	640.0
5.1/8	300	5.3/4	31.1/2	7.3/4	N/A	11	15.3/4	810.0
5.3/4	400	6.1/8	31.3/4	9.1/4	N/A	12.1/2	17.1/2	1140.0

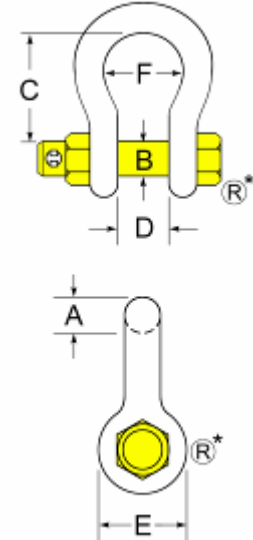

U.S. Registered Trademark No. 2,011,393

*The YELLOW Shackle Bolt is the federally registered trademark of KULKONI, INC.

Hot galvanized. Some shackles sizes 2.1/2" (80 tons) and up with aluminum base paint finish.


Some shackles sizes 2" and larger are supplied with nut and cotter pin on both ends of bolt.

** For sizes 1.1/2" - 3": Minimum Width Between Eyes as defined by Federal Specification RR-C-271D, Amendment 1.

FORGED ALLOY "WIDE BODY" SLING SHACKLES

All Sizes forged all-alloy steel, heat treated, permanently marked with manufacturer and WLL. Galvanized-painted finish on bodies, pins painted yellow. Mill Proof Test Certification to 2 x WLL up to 300 ton, 1.33 x WLL for 400 ton and above. ABS, Lloyds, DNV or similar certification available for an additional charge on factory orders.

Working Load Limit in Metric Tons	Bolt Diam. in Inches (A)	Bolt Diam. in mm	Approx. Weight Each in Pounds	Dimensions in Inches				
				B	C	D	E	F
30	1.65	42	24	1.57	2.56	6.50	5.00	3.11
40	2.00	51	35	1.77	3.15	8.66	5.51	3.82
50 / 55	2.25	57	69	2.16	3.35	9.45	6.30	3.94
75	2.75	70	132	2.75	4.13	11.42	7.32	4.72
125	3.15	80	230	3.35	5.11	14.37	8.66	5.90
150	3.74	95	299	3.50	5.51	15.35	9.84	6.69
200	4.13	105	442	3.94	5.91	18.90	10.86	8.07
250	4.72	120	603	4.33	6.69	21.26	11.81	9.45
300	5.28	134	823	4.80	7.28	23.62	13.78	10.43
400	6.30	160	1293	5.70	8.66	26.57	14.57	12.60
500	7.09	180	1632	6.30	9.84	26.77	17.71	13.39
600	7.88	200	2387	6.70	10.83	29.13	19.29	14.57
700	8.46	215	2780	7.48	11.81	29.53	21.26	15.75
800	9.06	230	3770	7.87	12.80	33.46	21.81	16.54
900	10.04	255	4365	8.66	13.78	33.46	22.99	17.32
1000	10.63	270	5180	9.45	14.96	33.46	24.17	18.11
1250	11.81	300	6490	10.24	16.93	36.61	25.35	20.87
1550	12.60	320	7720	11.02	18.11	37.40	26.77	22.05

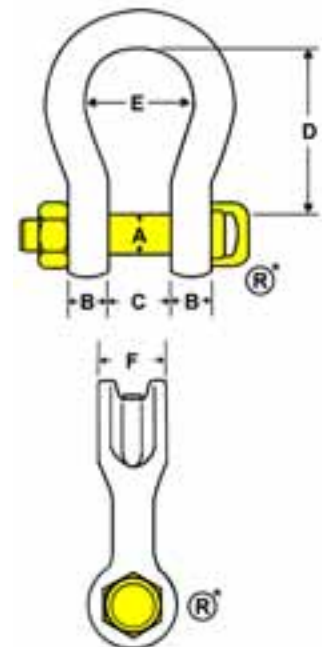

U.S. Registered Trademark No. 2,011,393

* The YELLOW Shackle Bolt is the federally registered trademark of KULKONI, INC