



GALVANIZED SCREW PIN ANCHOR SHACKLES


CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Do not use screw pin shackles if the pin can roll under load and unscrew.

Read important warnings and information in T.O.C. > GENERAL WARNINGS and SHACKLES ⚠️.

Meets the performance requirements of Federal Specification RR-C-271D, Type IV A, Class 2, Grade A, Amendment 1. Hot galvanized, forged carbon steel, heat treated, with alloy pins, permanently marked with size and Working Load Limit.

Sizes 3/16" through 2" also available in DOMESTIC

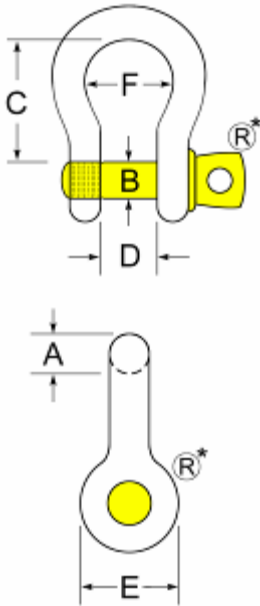

U.S. Registered Trademark No. 2,011,393


Size (A)	Working Load Limit (WLL) in tons	Bolt Ø (B)	Length inside (C)	Width between eyes (D)		(E)	(F)	Appx. Weight each in pounds
				Nominal	Tolerance			
3/16	1/3	1/4	7/8	3/8	± 1/16	5/8	9/16	.05
1/4	1/2	5/16	1.1/8	15/32	± 1/16	7/8	3/4	.13
5/16	3/4	3/8	1.1/4	17/32	± 1/16	1	13/16	.21
3/8	1	7/16	1.7/16	21/32	± 1/16	1.1/8	15/16	.33
7/16	1.1/2	1/2	1.11/16	3/4	± 1/16	1.1/4	1.1/16	.47
1/2	2	5/8	1.7/8	13/16	± 1/16	1.3/8	1.3/16	.78
5/8	3.1/4	3/4	2.3/8	1.1/16	± 1/16	1.7/8	1.1/2	1.44
3/4	4.3/4	7/8	2.13/16	1.1/4	± 1/16	2.1/8	1.3/4	2.3
7/8	6.1/2	1	3.5/16	1.7/16	± 1/16	2.3/8	2	3.5
1	8.1/2	1.1/8	3.3/4	1.11/16	± 1/8	2.5/8	2.5/16	5.0
1.1/8	9.1/2	1.1/4	4.1/4	1.13/16	± 1/8	2.7/8	2.5/8	7.0
1.1/4	12	1.3/8	4.11/16	2.1/32	± 1/8	3.1/4	2.7/8	9.5
1.3/8	13.1/2	1.1/2	5.1/4	2.1/4	± 1/8	3.1/2	3.1/4	13.0
1.1/2	17	1.5/8	5.3/4	2.3/8	± 1/8	3.3/4	3.3/8	16.5
1.3/4	25	2	7	2.7/8	± 3/16	4.1/2	4.1/2	29.0
2	35	2.1/4	7.3/4	3.1/4	± 3/16	5.1/4	5.1/4	43.0
2.1/4	45	2.1/2	9.1/4	3.7/8	± 3/16	5.3/4	5.1/2	59.4
2.1/2	55	2.3/4	10.1/2	4.1/8	± 1/4	6.1/4	6.3/4	86.0
3	85	3.1/4	13	5	± 1/4	6.3/4	7.3/8	119.5

** Width Between Eyes as defined by Federal Specification RR-C-271D, Amendment 1.

STAINLESS SCREW PIN ANCHOR SHACKLES

Read important warnings and information in T.O.C. > GENERAL WARNINGS and SHACKLES ⚠️

TYPE 304 OR 316, cast or forged



Dimensions are the same as Galvanized Screw Pin Anchor Shackles above.

Size	Working Load Limit in Pounds	Pin Diameter in Inches	Approximate Weight Each in Pounds
3/16"	300	1/4	.04
1/4"	450	5/16	.10
5/16"	650	3/8	.18
3/8"	1,000	7/16	.29
1/2"	1,990	5/8	.74
5/8"	3,050	3/4	1.4
3/4"	4,475	7/8	2.3
7/8"	6,000	1	3.5
1"	7,950	1.1/8	5.1