



GALVANIZED SCREW PIN CHAIN SHACKLES


CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Do not use screw pin shackles if the pin can roll under load and unscrew.

Read important warnings and information in T.O.C. > GENERAL WARNINGS and SHACKLES ⚠️.

Meets the performance requirements of Federal Specification RR-C-271D, Type IV B, Class 2, Grade A, Amendment 1. Hot galvanized, forged carbon steel, heat treated, with alloy pins, permanently marked with size and Working Load Limit.

Size (A)	Working Load Limit (WLL) in tons	Bolt Ø (B)	Length inside (C)	Width between eyes (D)		(E)	Appx. Weight each in pounds
				Nominal	Tolerance		
1/4	1/2	5/16	7/8	15/32	± 1/16	7/8	.09
5/16	3/4	3/8	1.1/32	17/32	± 1/16	1	.17
3/8	1	7/16	1.1/4	21/32	± 1/16	1.1/8	.32
7/16	1.1/2	1/2	1.7/16	3/4	± 1/16	1.1/4	.43
1/2	2	5/8	1.5/8	13/16	± 1/16	1.3/8	.80
5/8	3.1/4	3/4	2	1.1/16	± 1/16	1.7/8	1.3
3/4	4.3/4	7/8	2.3/8	1.1/4	± 1/16	2.1/8	2.2
7/8	6.1/2	1	2.13/16	1.7/16	± 1/16	2.3/8	3.2
1	8.1/2	1.1/8	3.3/16	1.11/16	± 1/8	2.5/8	5.1
1.1/8	9.1/2	1.1/4	3.9/16	1.13/16	± 1/8	2.7/8	6.5
1.1/4	12	1.3/8	3.15/16	2.1/32	± 1/8	3.1/4	9.0
1.3/8	13.1/2	1.1/2	4.7/16	2.1/4	± 1/8	3.1/2	12.2
1.1/2	17	1.5/8	4.7/8	2.3/8	± 1/8	3.3/4	17.0
1.3/4	25	2	5.3/4	2.7/8	± 3/16	4.1/2	25.5
2	35	2.1/4	6.3/4	3.1/4	± 3/16	5.1/4	37.0
2.1/2	55	2.3/4	8	4.1/8	± 1/4	6.1/4	75.0
3	85	3.1/4	9	5	± 1/4	6.3/4	108.0

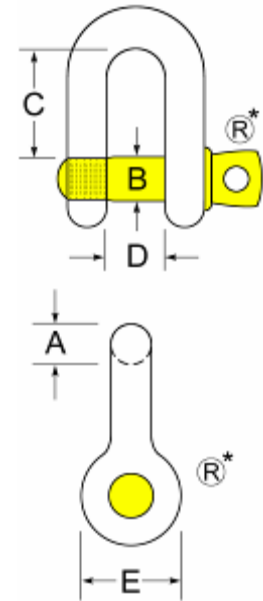

U.S. Registered Trademark No. 2,011,393

** Minimum Width Between Eyes as defined by Federal Specification RR-C-271D, Amendment 1.


GALVANIZED ROUND PIN ANCHOR SHACKLES

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Read important warnings and information in T.O.C. > GENERAL WARNINGS and SHACKLES ⚠️.

Meets the performance requirements of Federal Specification RR-C-271D, Type IV A, Class 1, Grade A, Amendment 1. Hot galvanized, forged carbon steel, heat treated, with alloy pins, permanently marked with size and Working Load Limit.

Size (A)	Working Load Limit (WLL) in tons	Bolt Ø (B)	Length inside (C)	Width between eyes (D)		(E)	(F)	Appx. weight each in pounds
				Nominal	Tolerance			
5/16	3/4	3/8	1.1/4	17/32	± 1/16	1	13/16	.19
3/8	1	7/16	1.7/16	21/32	± 1/16	1.1/8	15/16	.33
1/2	2	5/8	1.7/8	13/16	± 1/16	1.3/8	1.3/16	.76
5/8	3.1/4	3/4	2.3/8	1.1/16	± 1/16	1.7/8	1.1/2	1.44
3/4	4.3/4	7/8	2.13/16	1.1/4	± 1/16	2.1/8	1.3/4	2.3
7/8	6.1/2	1	3.5/16	1.7/16	± 1/16	2.3/8	2	3.5
1	8.1/2	1.1/8	3.3/4	1.11/16	± 1/8	2.5/8	2.5/16	5.0

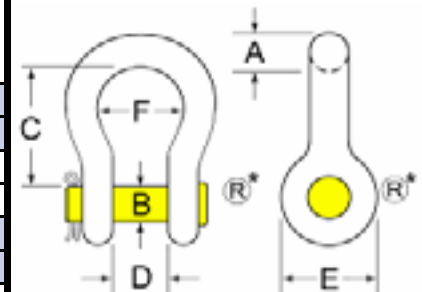

U.S. Registered Trademark No. 2,011,393

** Minimum Width Between Eyes as defined by Federal Specification RR-C-271D, Amendment 1.