




SWAGING SLEEVES

Read important warnings and information in T.O.C. > **GENERAL WARNINGS and SWAGING SLEEVES** ⚠

Caution: When attaching swage sockets to wire rope it is extremely important to follow recommended procedures.

DOMESTIC

CARBON STEEL SWAGING SLEEVES recommended for flemished eyes only.

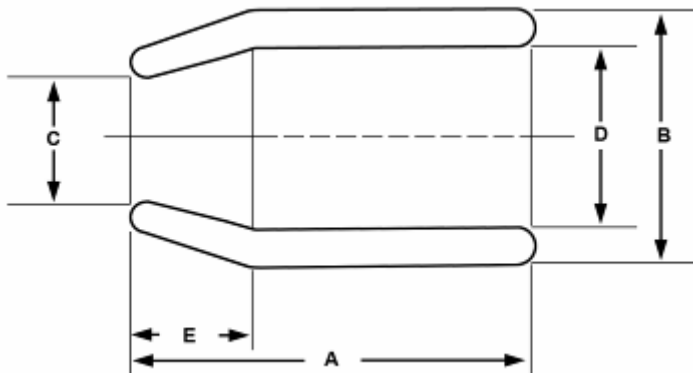

Rope Diameter in Inches	Dimensions in Inches							Weight Each in Pounds
	A	B	C	D	E	Wall Thickness	After Swage Diameter	
1/4"	1	21/32	21/64	15/32	9/32	3/32	.50	.08
5/16"	1.1/2	29/32	7/16	39/64	7/16	9/64	.73	.09
3/8"	1.1/2	29/32	15/32	21/32	7/16	1/8	.73	.12
7/16"	2	1.7/32	9/16	27/32	19/32	3/16	.98	.30
1/2"	2	1.7/32	5/8	29/32	19/32	5/32	.98	.29
9/16"	2.3/4	1.15/32	11/16	1.1/32	45/64	7/32	1.20	.43
5/8"	2.3/4	1.15/32	3/4	1.3/32	45/64	3/16	1.20	.57
3/4"	3.3/16	1.23/32	59/64	1.9/32	55/64	7/32	1.41	.88
7/8"	3.9/16	2.1/32	1.1/32	1.17/32	1	1/4	1.63	1.36
1"	4	2.9/32	1.5/32	1.23/32	1.1/8	9/32	1.88	1.95
1.1/8"	4.13/16	2.1/2	1.9/32	1.15/16	1.1/4	9/32	2.08	2.60
1.1/4"	5.13/64	2.25/32	1.7/16	2.5/32	1.13/32	5/16	2.27	3.40
1.3/8"	5.13/16	3	1.9/16	2.3/8	1.9/16	5/16	2.46	4.30
1.1/2"	6.1/4	3.1/4	1.11/16	2.5/8	1.11/16	5/16	2.65	5.00
1.3/4"	7.1/4	3.27/32	1.15/16	3.1/8	1.31/32	23/64	3.04	8.10
2"	8.1/2	4.3/8	2.1/4	3.5/8	2.1/4	3/8	3.50	11.25
2.5"	10.1/2	5.1/2	2.3/4	4.1/2	2.13/16	1/2	4.44	23.2
3"	12	6	3.1/4	5	3.3/8	1/2	4.89	29.4