



DROP FORGED SWIVELS


CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

Read important warnings and information in T.O.C. > GENERAL WARNINGS and SWIVELS ⚠️.
SWIVELS ARE NOT INTENDED TO ROTATE UNDER LOAD

JAW & EYE SWIVELS

Meets or exceeds the performance requirements of Federal Specification RR-C-271D. Hot galvanized.

Size (A)	Working Load Limit in Pounds	Approx. Wt. each in Pounds	Dimensions in Inches					
			B	C	D	E	F	G
1/4"	850	.22	.69	.75	.38	.88	2.69	.25
5/16"	1,250	.39	.88	1.00	.50	.88	2.88	.31
3/8"	2,250	.71	.94	1.25	.63	1.00	3.50	.38
1/2"	3,600	1.40	1.38	1.50	.81	1.31	4.50	.50
5/8"	5,200	2.30	1.63	1.75	1.00	1.50	5.31	.63
3/4"	7,200	3.50	1.75	2.00	1.19	1.75	6.06	.75
7/8"	10,000	5.70	2.08	2.25	1.20	2.07	7.06	.88
1"	12,500	9.50	2.27	2.44	1.73	2.85	8.56	1.12
1.1/4"	18,000	16.00	2.69	3.13	2.06	2.81	9.44	1.38
1.1/2"	45,200	55.00	4.20	4.00	2.87	4.43	14.75	2.25

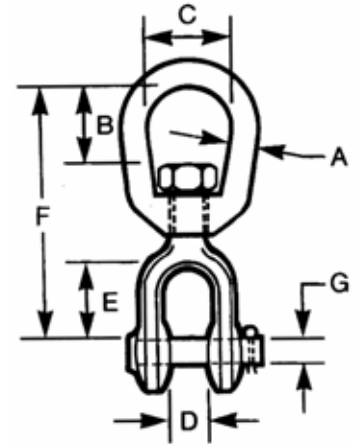

EYE & EYE SWIVELS

Meets or exceeds the performance requirements of Federal Specification RR-C-271D. Hot galvanized.

Size (A)	Working Load Limit in Pounds	Approx. Wt. each in Pounds	Dimensions in Inches			
			B	C	E	F
1/4"	850	.22	.69	.75	.94	2.88
5/16"	1,250	.39	.75	1.00	1.13	3.63
3/8"	2,250	.71	.94	1.25	1.38	4.25
1/2"	3,600	1.4	1.38	1.50	1.94	5.63
5/8"	5,200	2.3	1.63	1.75	2.31	6.63
3/4"	7,200	3.5	1.81	2.00	2.56	7.25
7/8"	10,000	6	2.06	2.25	3.02	8.28
1"	12,500	8.5	2.35	2.48	3.43	9.53
1.1/4"	18,000	16.5	2.69	3.13	3.69	11.13
1.1/2"	45,200	46	4.18	4.00	4.18	17.12

