


DOMESTIC G100 CHAIN & FITTINGS

CAUTION: NEVER EXCEED WORKING LOAD LIMITS

DOMESTIC GRADE 100 CHAIN SIZES AND WORKING LOAD LIMITS

GRADE 100 — PROOF TESTED

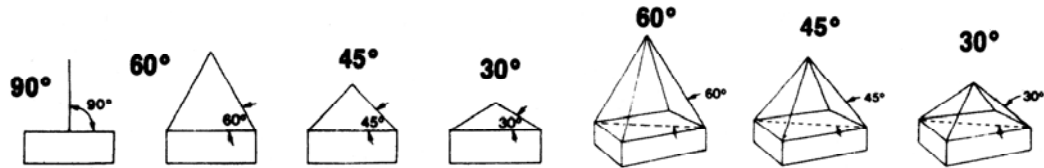


Working Load Limits (lbs.)



Chain Size (IN.)	(MM)	Single				Triple & Quad		
		90°	60°	45°	30°	60°	45°	30°
9/32	7.0	4,300	7,400	6,100	4,300	11,200	9,100	6,400
3/8	10.0	8,800	15,200	12,400	8,800	22,900	18,700	13,200
1/2	13.0	15,000	26,000	21,200	15,000	39,000	31,800	22,500
5/8	16.0	22,600	39,100	32,000	22,600	58,700	47,900	33,900
3/4	20.0	35,300	61,100	49,900	35,300	91,700	74,900	53,000

Chain Size		Nominal Dimensions (Inches)		Approx. No. Links per Foot	Approx. Weight Per 100 Ft. (lbs.)	Feet per Drum
(IN.)	(MM)	Length Inside	Inside Width			
9/32	7.0	868	.380	13.8	73.1	500
3/8	10.0	1.181	.512	9.8	148.0	500
1/2	13.0	1.535	.688	8.5	255.0	300
5/8	16.0	1.890	.819	6.9	383.0	200
3/4	20.0	2.362	1.024	5.5	625.0	100



CM FOUNDRY HOOK—G80 & G100—100% PROOF TESTED

Chain Size (in.)	Working Load Limit G-80	Working Load Limit G-100														Weight Each (lbs.)
			B	D	E	G	H	I	K	L	M	N	O	R		
9/32	3,500	5,700	1.56	4.75	2.50	6.45	.47	1.00	1.56	.63	4.75	2.50	1.23	.25	2.4	
3/8	7,100	8,800	2.00	5.75	3.00	7.88	.63	1.27	1.88	.75	5.75	3.00	1.50	.31	4.5	
1/2	12,000	15,000	2.50	6.75	3.50	9.38	.75	1.50	2.22	1.00	6.88	3.50	1.75	.37	7.1	
5/8	18,100	22,600	3.00	7.81	4.00	10.97	.88	1.81	2.63	1.25	8.06	4.00	2.03	.43	11.6	
3/4	28,300	35,300	3.50	9.13	4.50	12.81	1.00	2.20	3.00	1.50	9.25	4.50	2.56	.50	20.0	
7/8	34,200	-	4.00	10.14	5.00	14.23	1.13	2.25	3.38	1.75	10.38	5.00	2.78	.56	26.0	
1	47,700	-	4.50	11.13	5.50	15.84	1.25	2.59	3.75	2.13	11.56	5.50	3.03	.62	36.8	
1.1/4	72,300	-	5.13	12.84	6.00	18.03	1.38	3.17	4.25	2.38	12.88	6.00	3.81	.75	58.4	